


# C & R TESTING LTD

## ALKIN High Pressure Compressors W32 DIESEL

### Standard Features

- P41 Purifier (Stainless Steel) with Refillable Purifier Element (Stainless Steel)
- 2nd and 3rd Stage Water Condensate & Oil Separator
- Inter coolers (Stainless Steel)
- After cooler (Stainless Steel)
- Priority Valve (Pressure Maintaining Valve)
- Check Valve
- Safety Valves at Each Stage
- Oil Level Glass
- Oil Pressure Switch
- Oil Pressure Gauge
- Electro statically Painted Portable Chassis
- Manual Condensate Drain
- Manual Start / Stop
- 2 Filling Hoses (Yokes, Filling Valves, Pressure Gauges, DIN Adapters)
- Air Quality complies with EN 12021

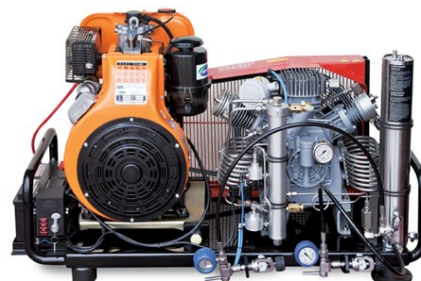

### Optional Features

- Electric Start
- Auto Stop
- Auto Condensate Drain
- Dual Pressure Systems 225-310 Bar / 3260-4500 Psi
- Extra Filling Hoses
- Disposable Filter Cartridge
- Gas Engine Drive

### Sectors

- Scuba Diving
- Fire Brigades
- Military Applications
- Naval Applications
- Civil Defence Applications
- Maritime Applications
- Industrial Applications
- Fish Farms
- Gas Filling Facilities

ALKIN Model	Working Pressure		Charging Rate*			Power		RPM	No of stage	Weight (kg)	Dimensions(cm)		
	Bar	Psi	Lt/min	M3/h	Cfm	Hp	Kw				Width	Length	Height
W32 DIESEL	225/310	3260/4500	250	15	8.8	9hp	-	1450	3	195	51	135	80
	225/310	3260/4500	300	18	11	13hp	-	1700	3	200	51	135	80

\*Based on recharging a 10 lt cylinder from 0 to 200 bar.

\*\*Higher pressure models up to 350 Bar are available.

\*\*\*ALKIN COMPRESSOR can change information and pictures in their brochure without any prior notice.

**C & R Testing Ltd.**  
**Unit 1 Owenshaw Mills, Old Cawsey, Sowerby Bridge, Halifax.**  
**HX6 2AF**  
**Tel: +44 (0)1422 410466, Email: [info@candrteting.co.uk](mailto:info@candrteting.co.uk)**